

PRE INSTALLATION GUIDE

FÖRINSTALLATIONSGUIDE
ANLEITUNG VOR DER INSTALLATION
預安裝指南

FOR

TopJuicer

scanomat



Scanomat
Download Center



Scanomat
Architect Pack
(2D/3D Files)



For TopJuicer
Version: 2.0
02-01-2020

Products Overview




* OPTIONALLY WITH CO₂

UNIT DETAILS	TopJuicer (for concentrate) TJ	Cooler 45* B1
Installation Dimensions (WxDxH)	394 x 454 x 510.5 mm	255 x 464 x 404 mm
Packing Dimensions (WxDxH)	420 x 480 x 530 mm	265 x 483 x 464 mm
Weight, gross.	30 kg	22 kg
Weight, net.	26 kg	19 kg
Carton Capacityv	3 x 10 liter	-
Throughput/hour	50 liter	45L
Approvals	CB	CE, ETL/UL, NSF
Power	EU 230-240V, 10 Amp 3-pin plug point for each unit. For Canada & US: 115V, 60 Hz, 10 Amp, plug point for each unit.	
Water	Direct Water Connection, 3/4" type shutoff valve Water pressure: 200kPa (2 Bar) - 600 kPa (6 Bar)	
Filtration	Areas with very hard water (above 15 dh°): C150 or C300 filter + 50% bypass All other areas: ActiveCoal 10.000 Filter for purification	
Drainage	Waste U-pipe, ø40mm. Manifold/drain plug (included, see Plumbing section) is inserted and components are connected here.	
Ventilation	Duct Fan Ventilation required. Cooler produces a lot of heat, which needs to be able to exit as per installation instructions in Carpenter section	

● TopJuicer

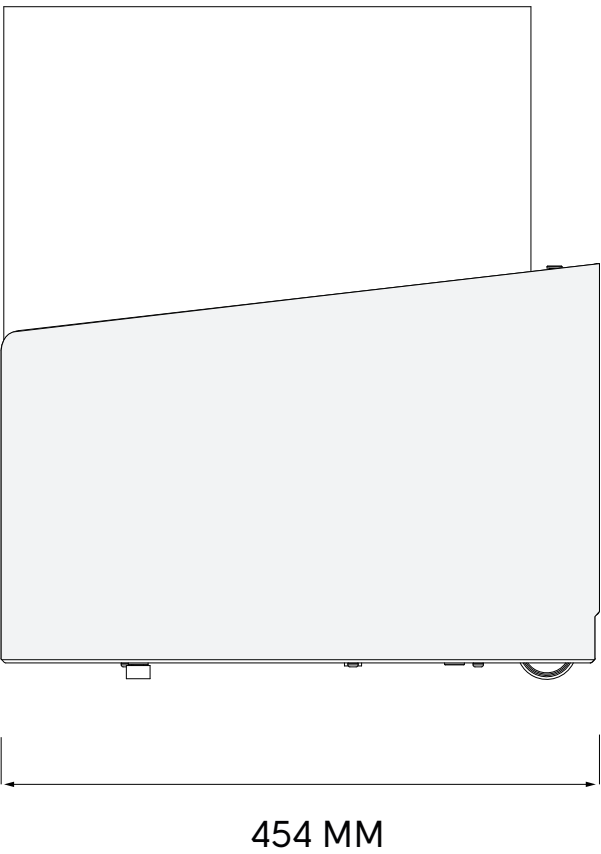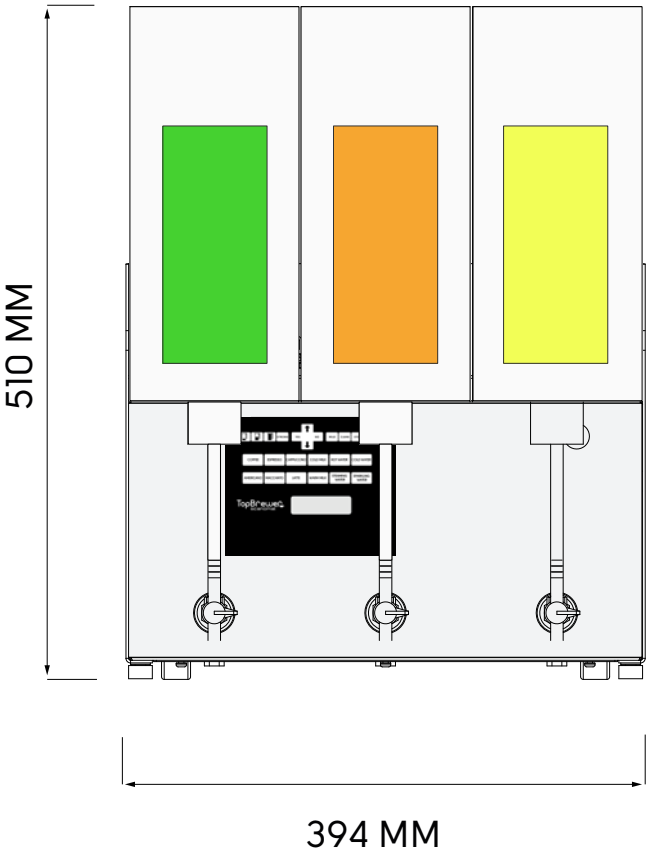

● Water cooler (B1)

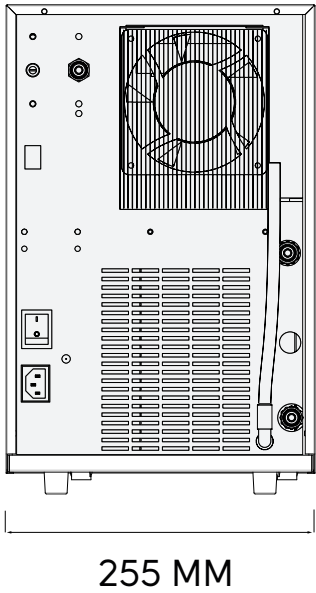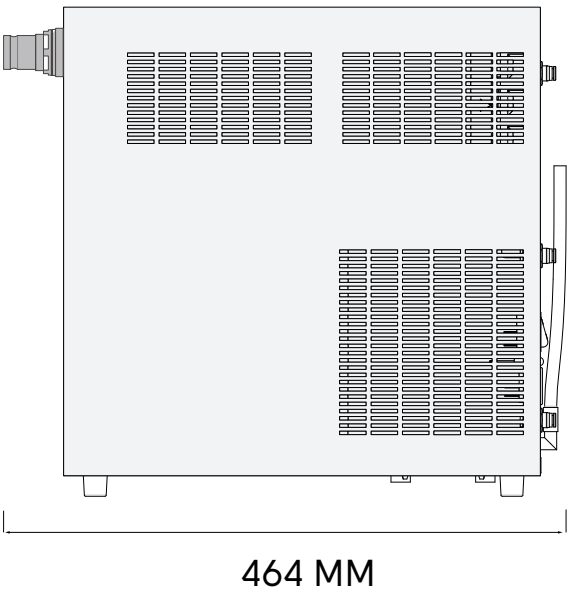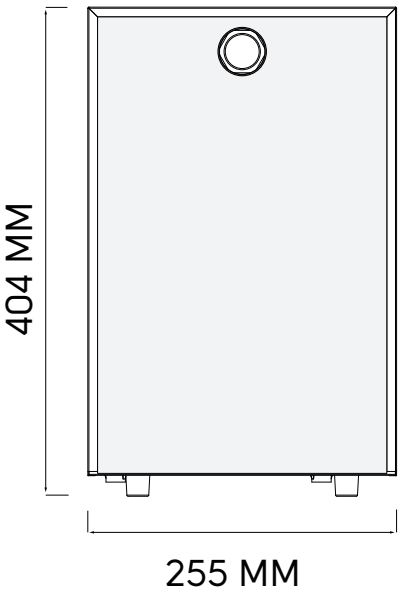

CARPENTER

SNICKARE

ZIMMERMANN

木匠



Carpentry preparations

Basic Installation



Ventilation pipe through toekick using SKU 4302774

Example 1

Using: TJ + B1

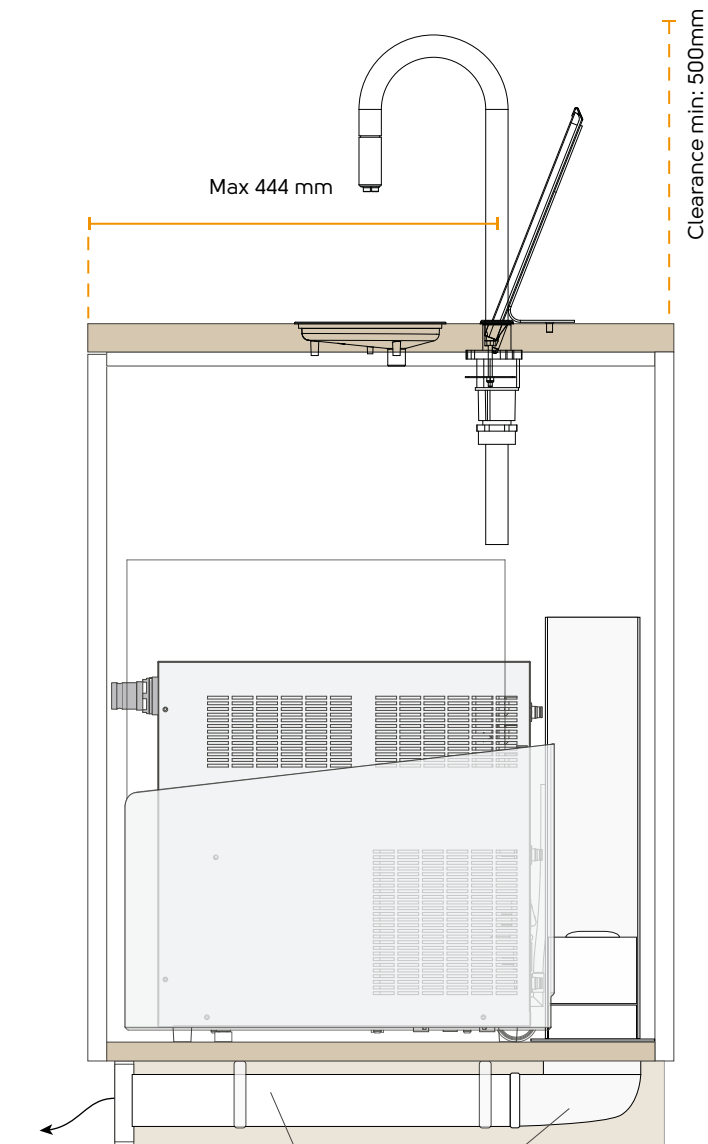

Flat Channel Duct + Angle
Sold seperately as SKU
4302789 and 4302790

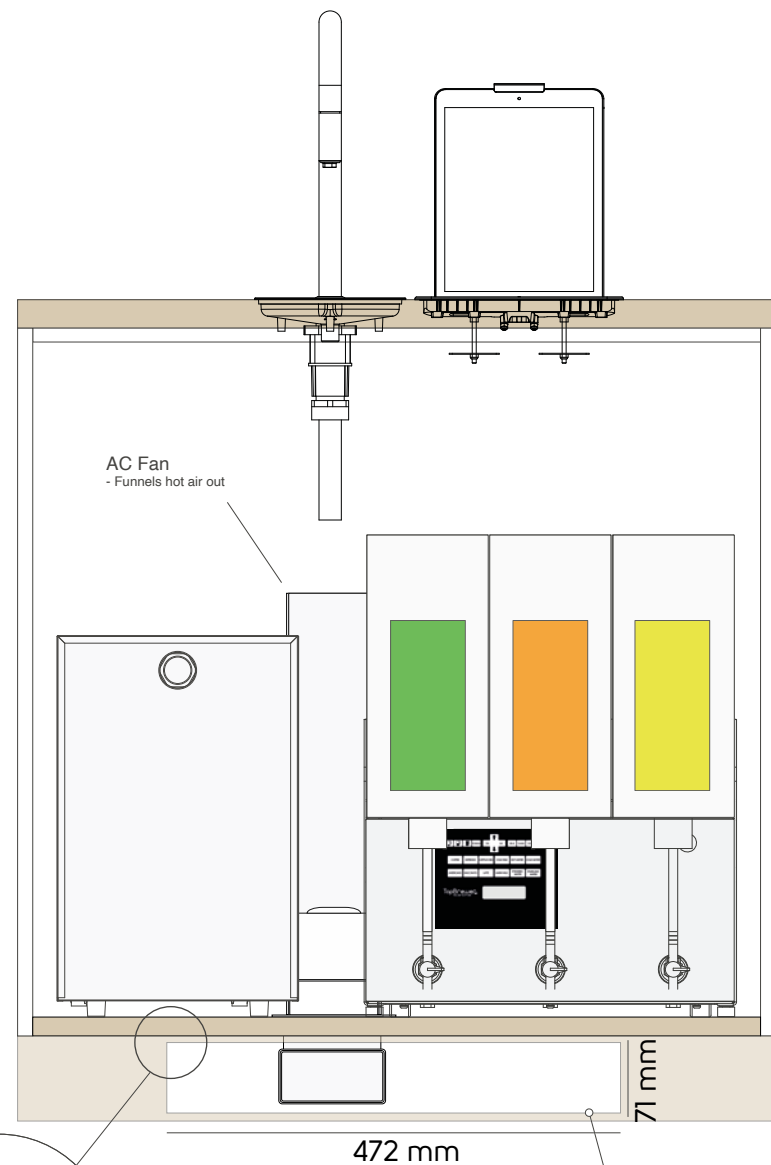


AC Fan
- Funnels hot air out

472 mm

Cut-out for standard aluminium grate.

A custom design can also be adapted.

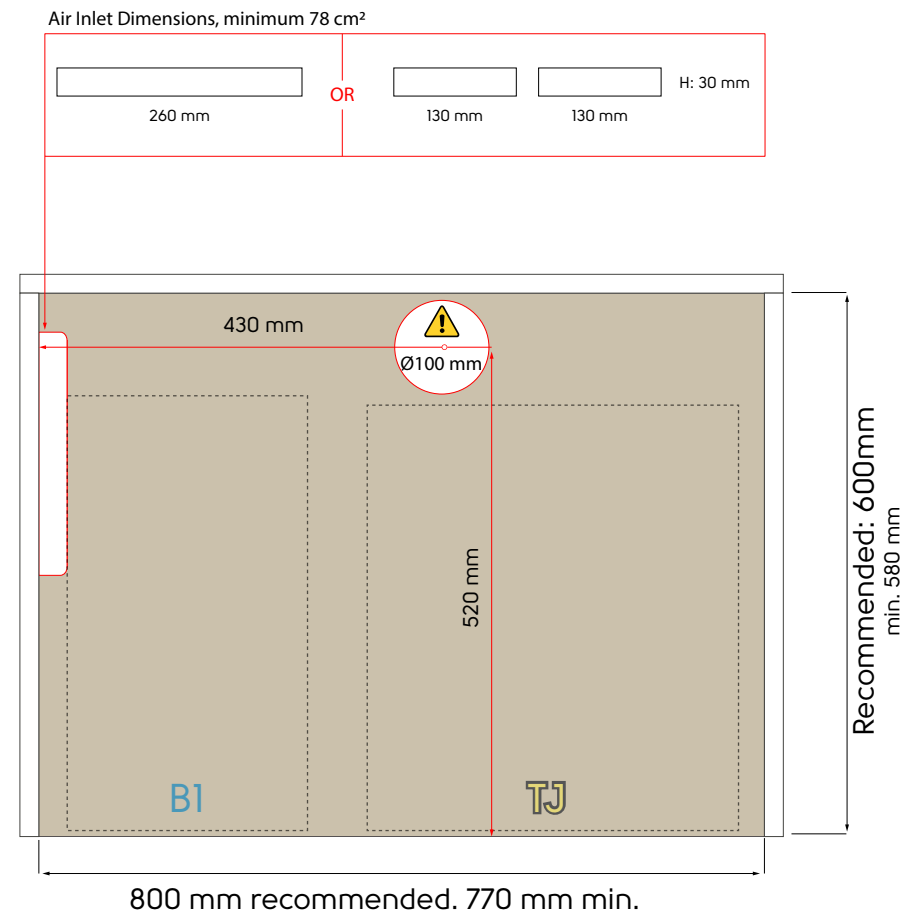

Side

Front

Top View

Carpentry preperations

Special Installation


Special example of behind-the-wall utilizations

CLICK HERE TO
SEE EXAMPLE


Example 1


Using: TJ + **B1**

 **AIR EXHAUST
SHOULD REMAIN
UNOBSTRUCTED**


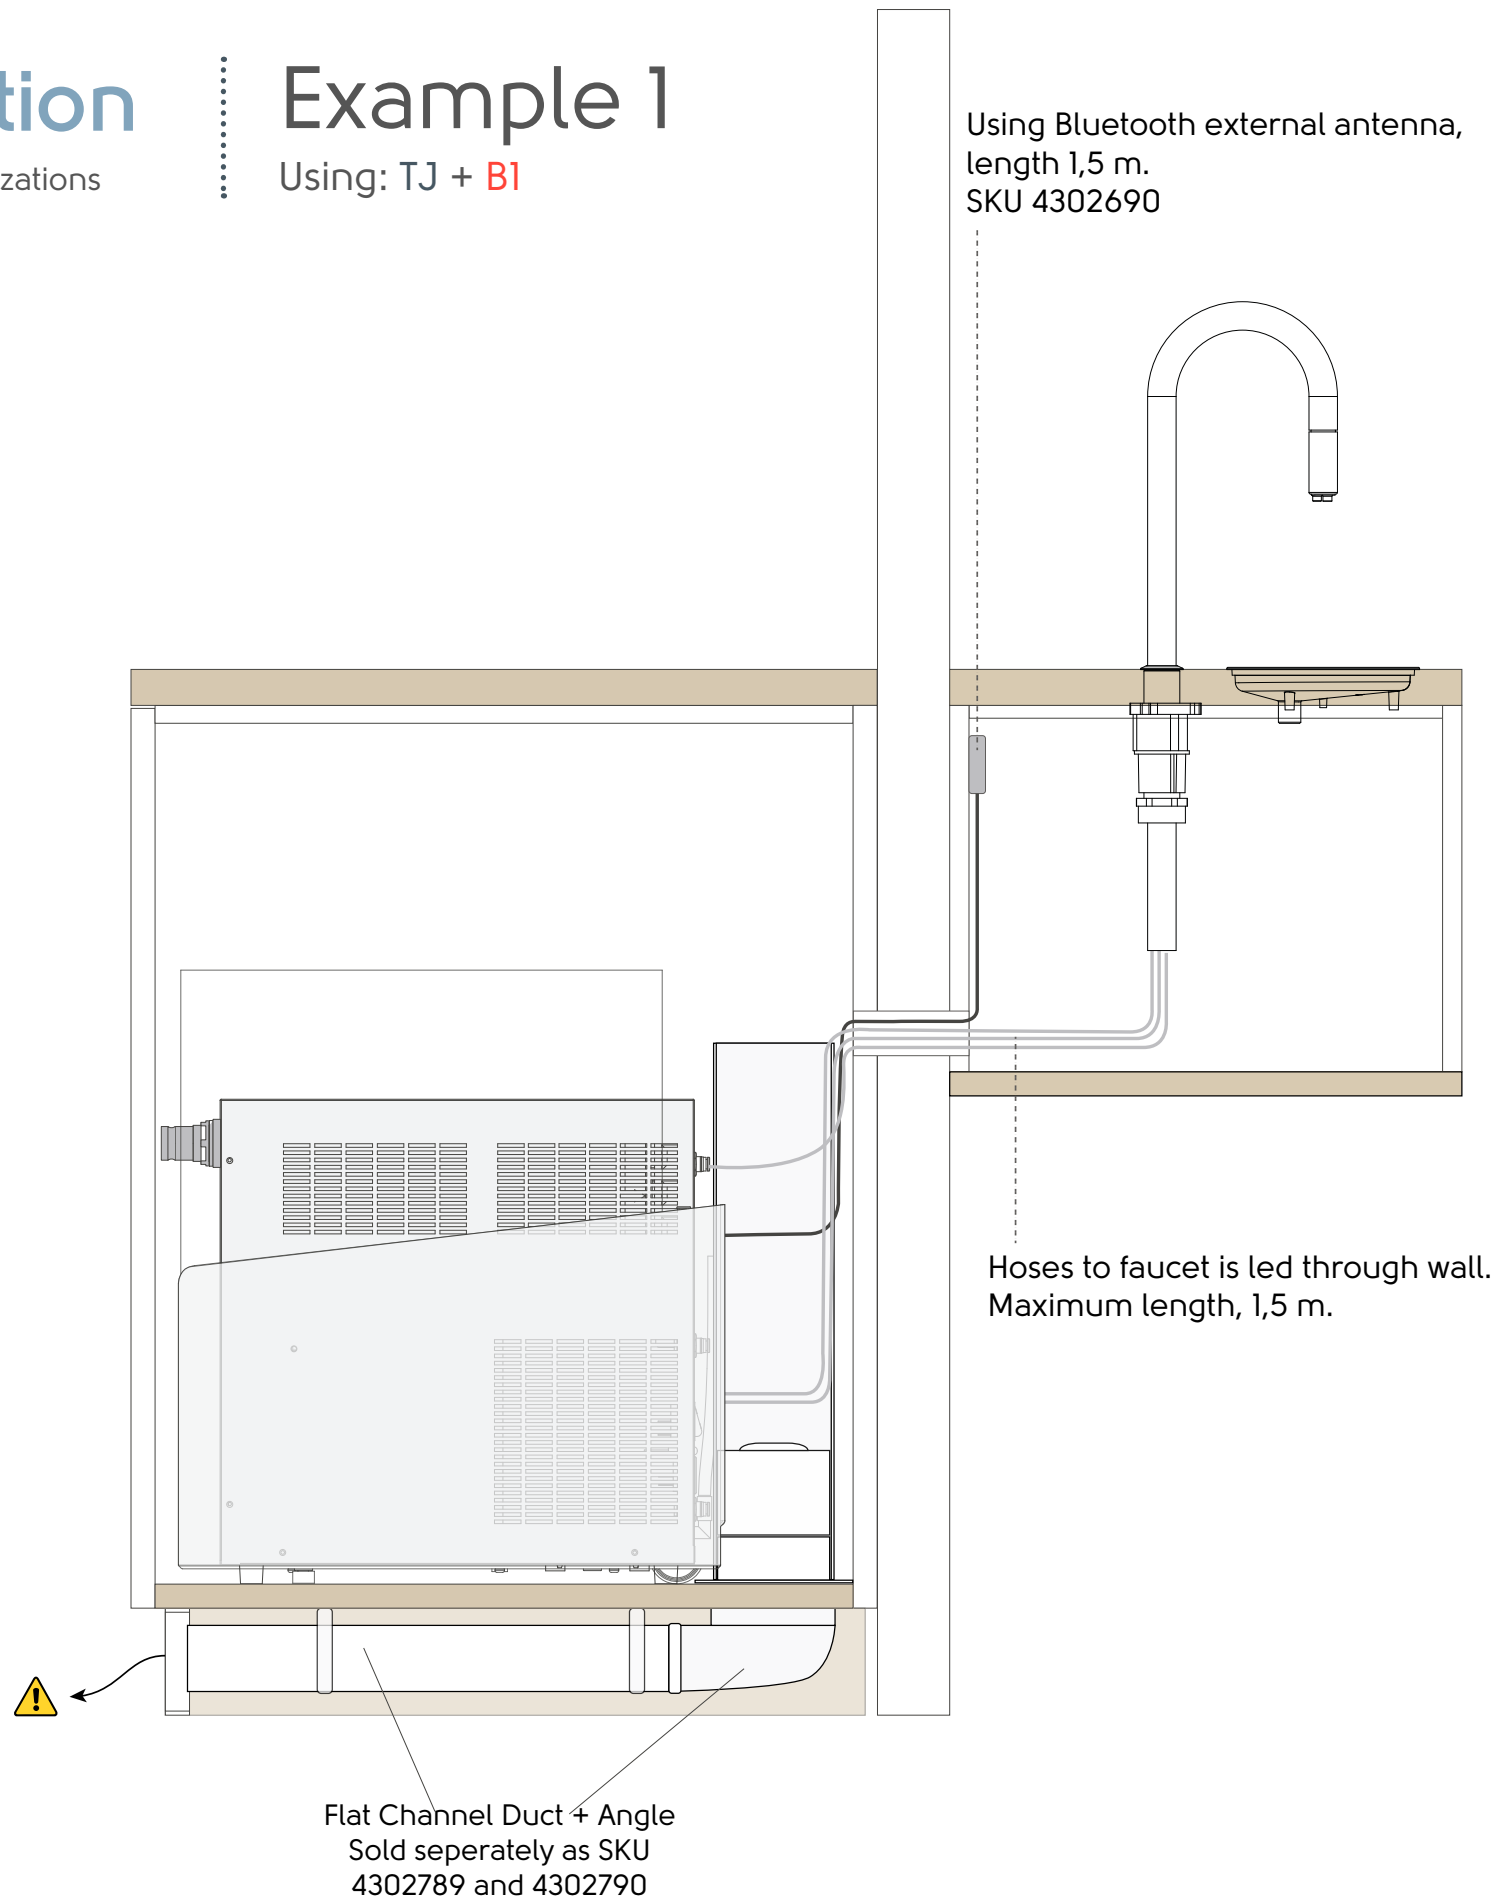


Overview of positioning

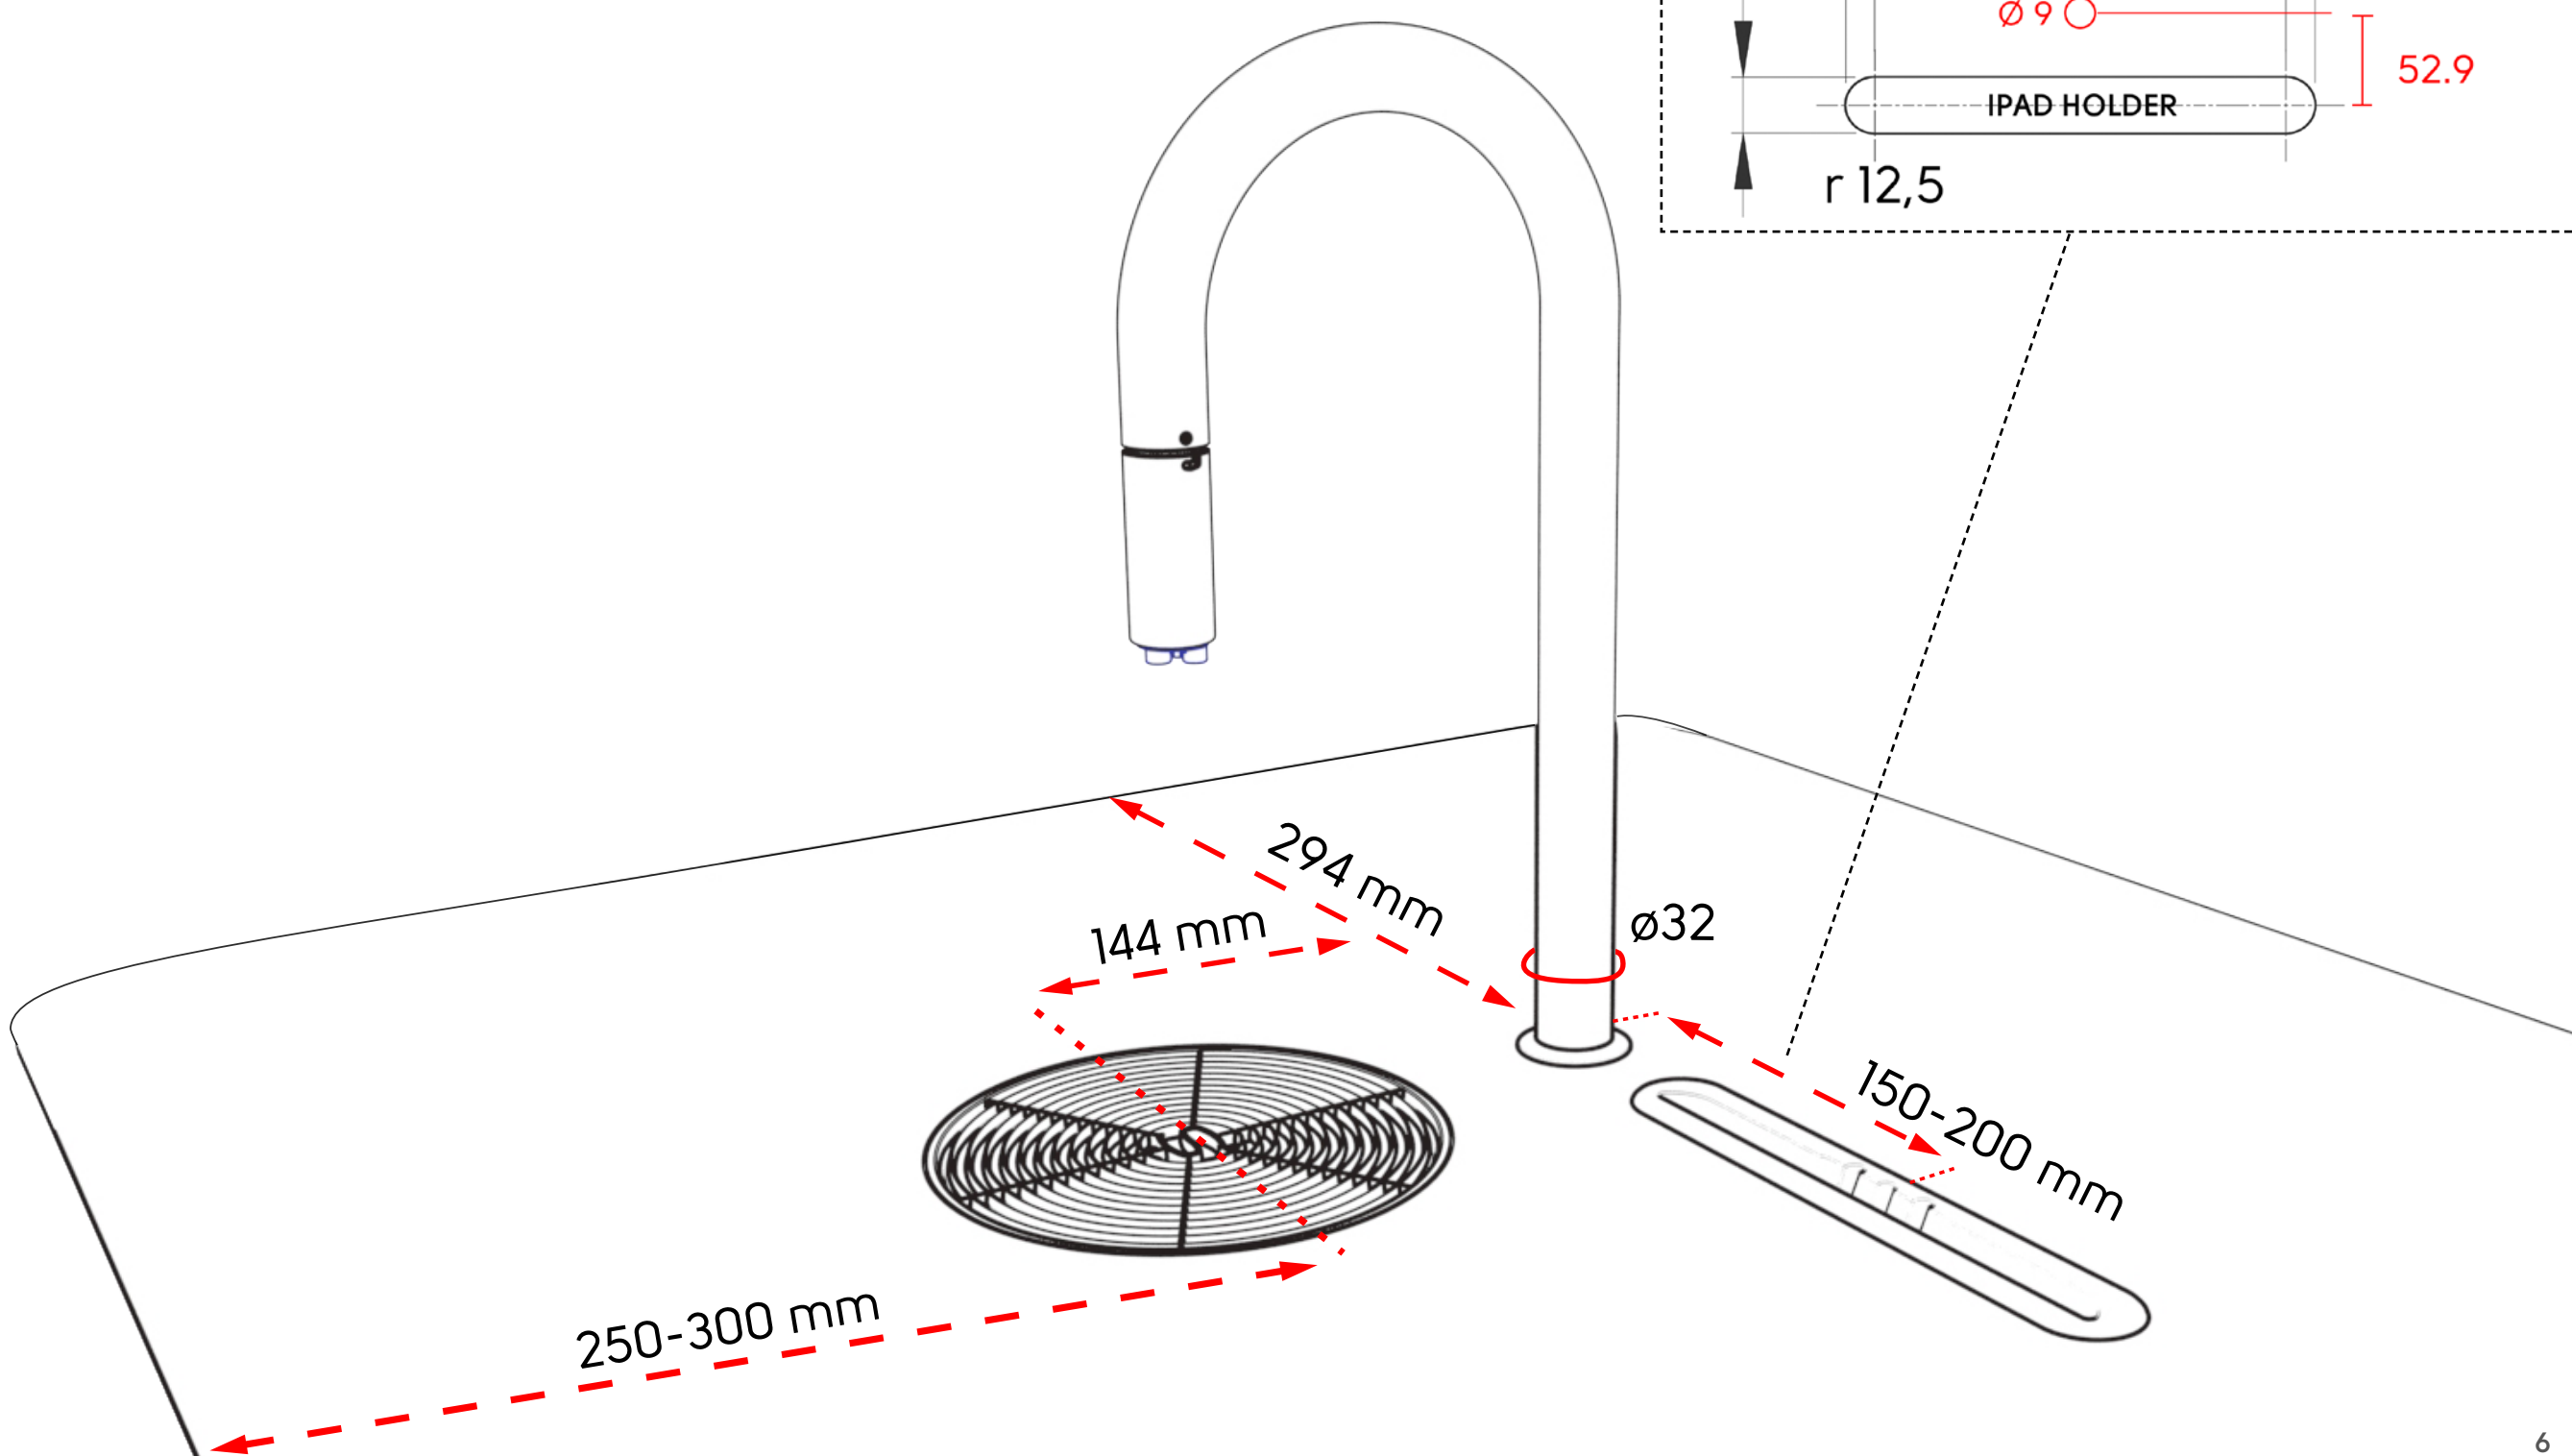

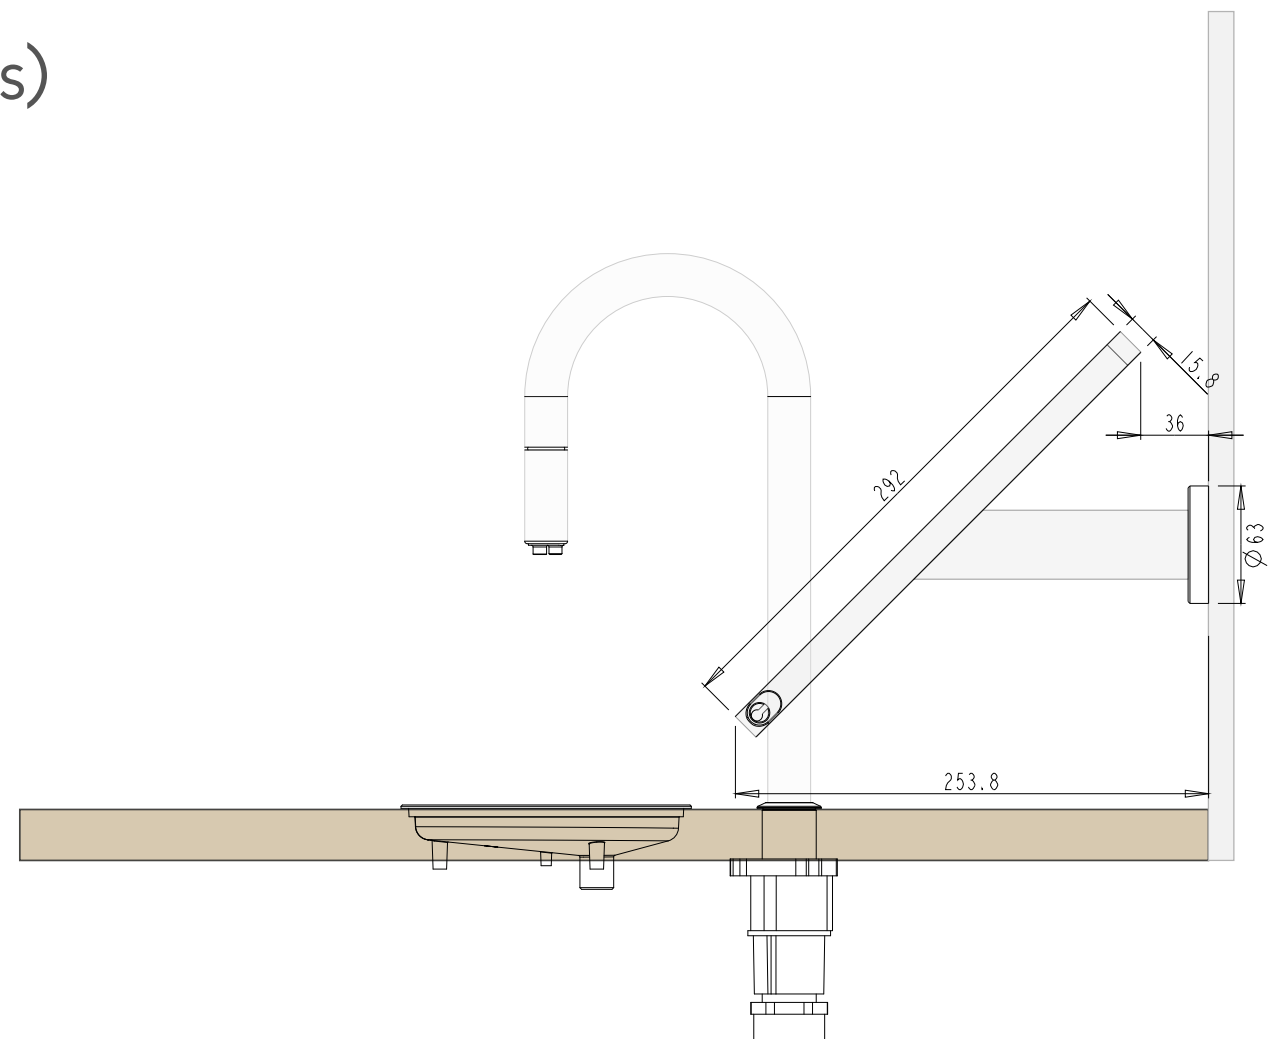

TopJuicer with pushbuttons

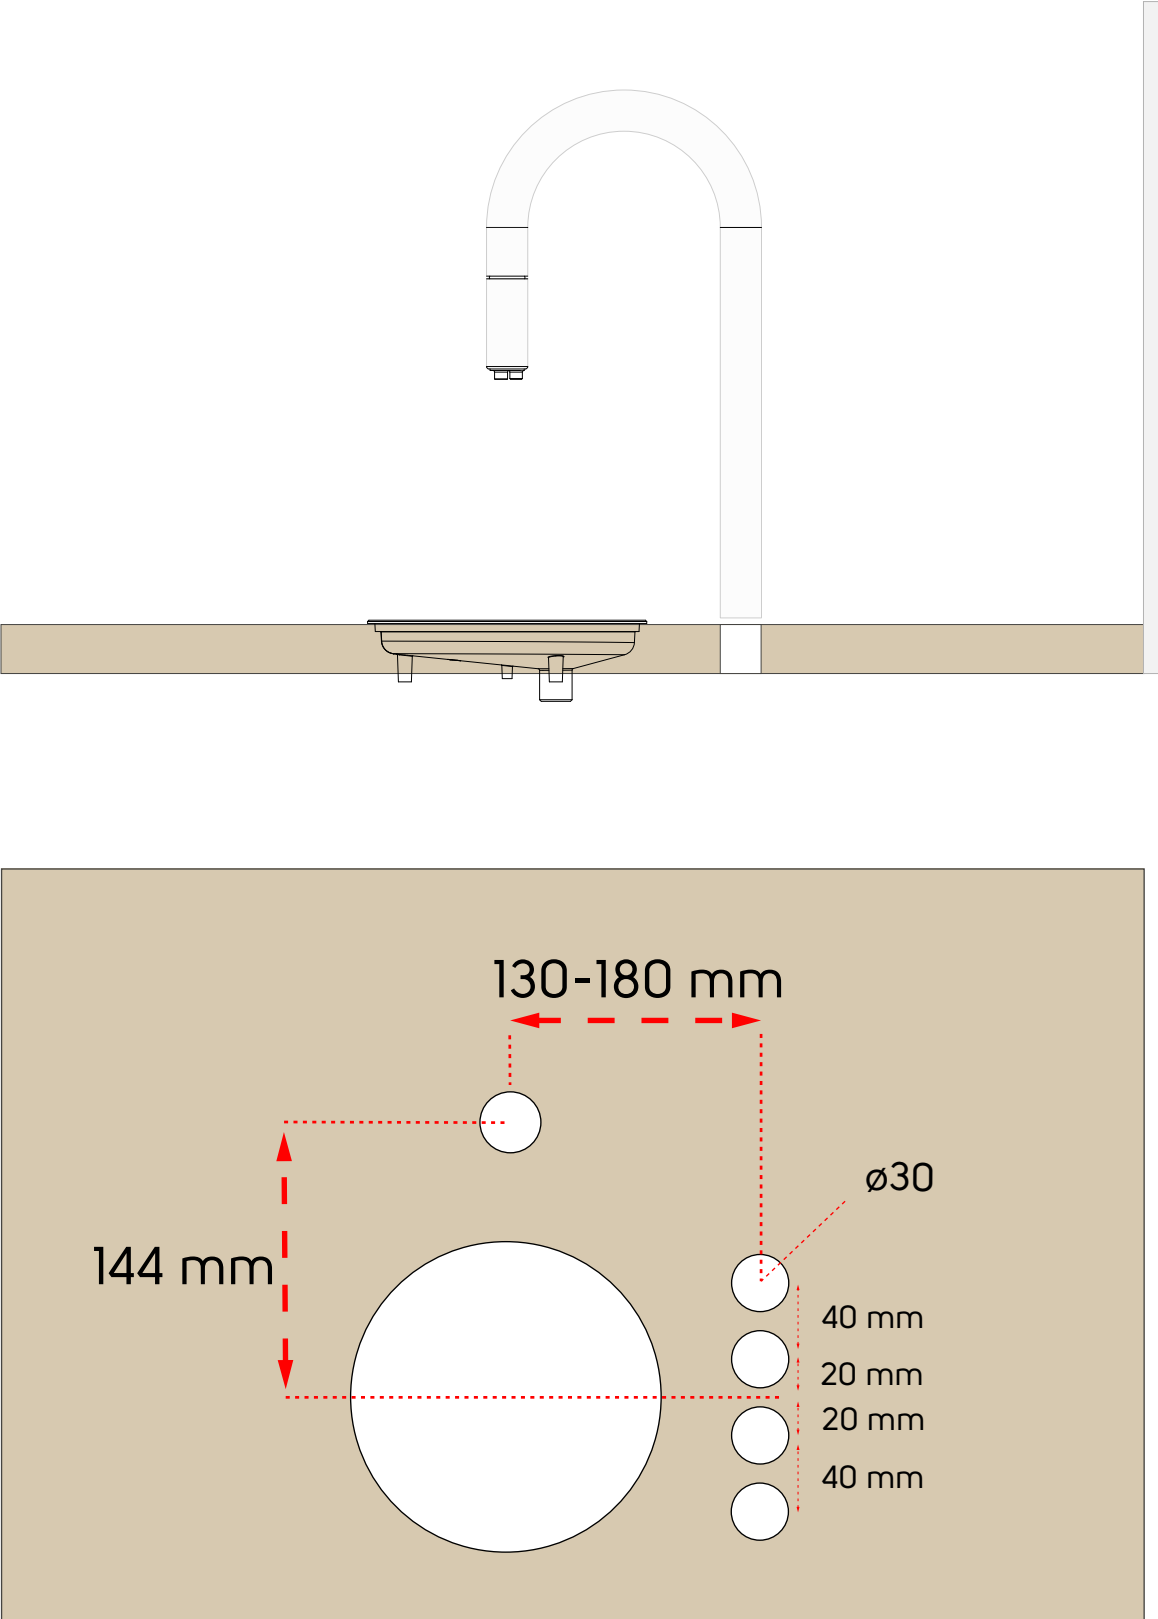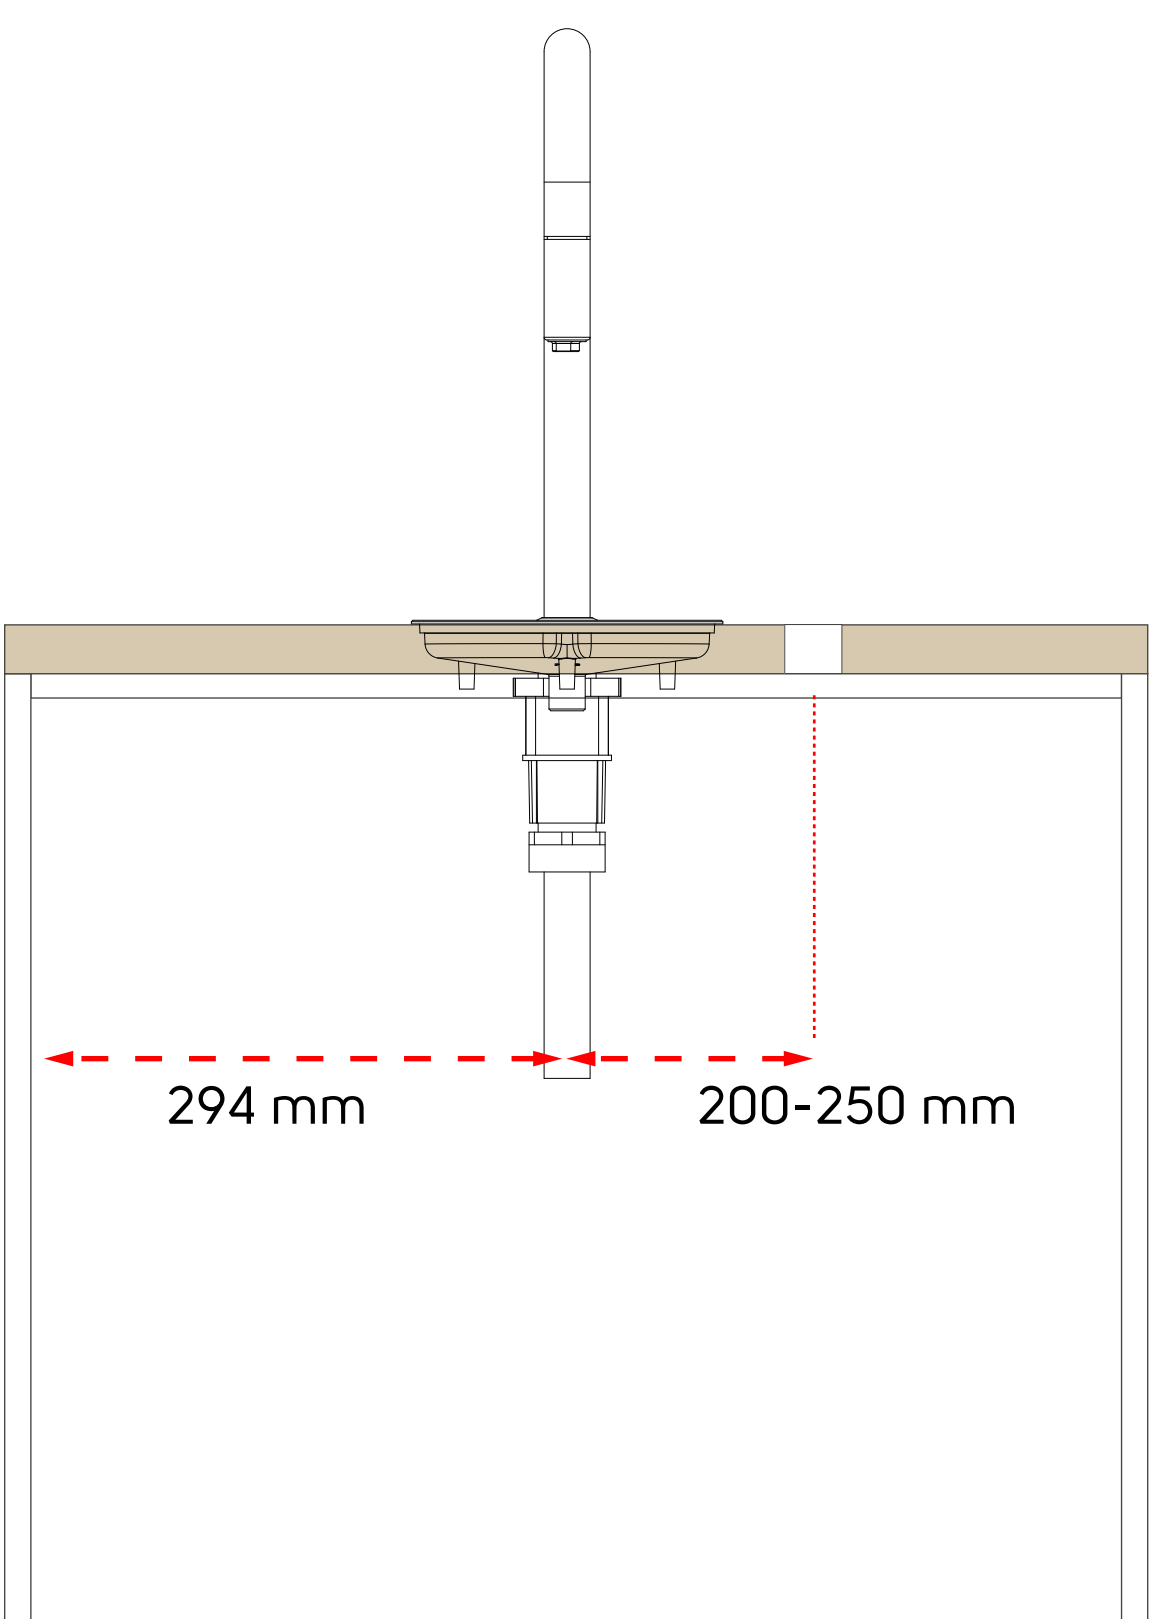

ELECTRIC

ELEKTRISK

ELEKTRISCH

電的


Electrical Requirements





IMPORTANT
Electrical Installations
to be placed here

All electrical must be
kept within boundary

Plug point
Cooler, Ventilation &
Optional iPad Charger



Single phase
230V, 10 amp
US & Canada:
Single phase 115V,
60 Hz, 10 Amp

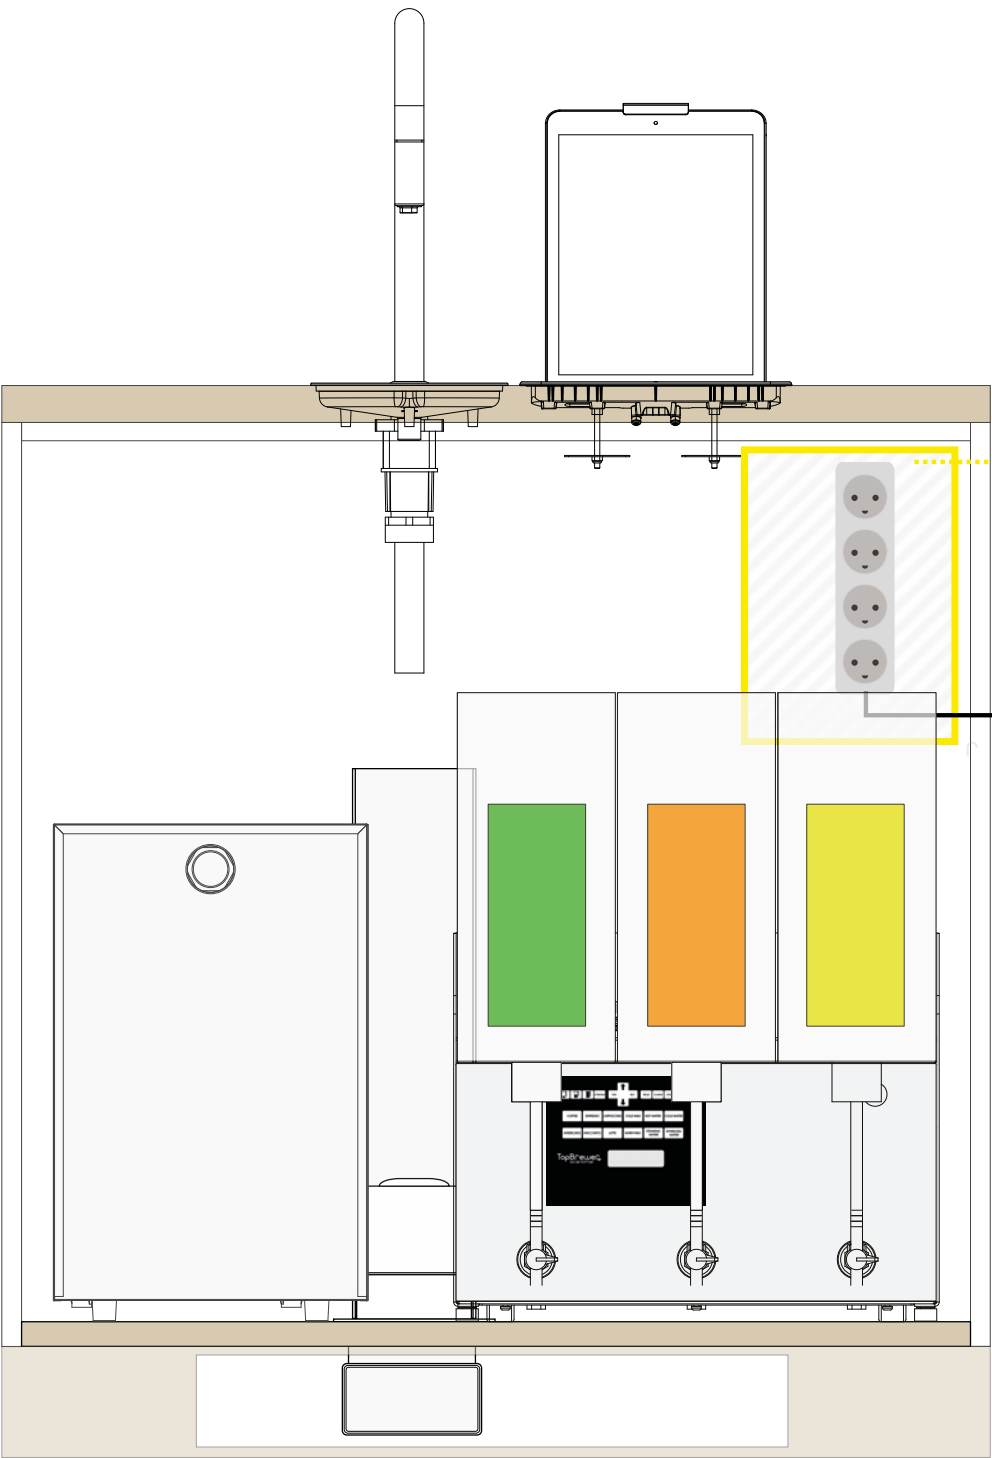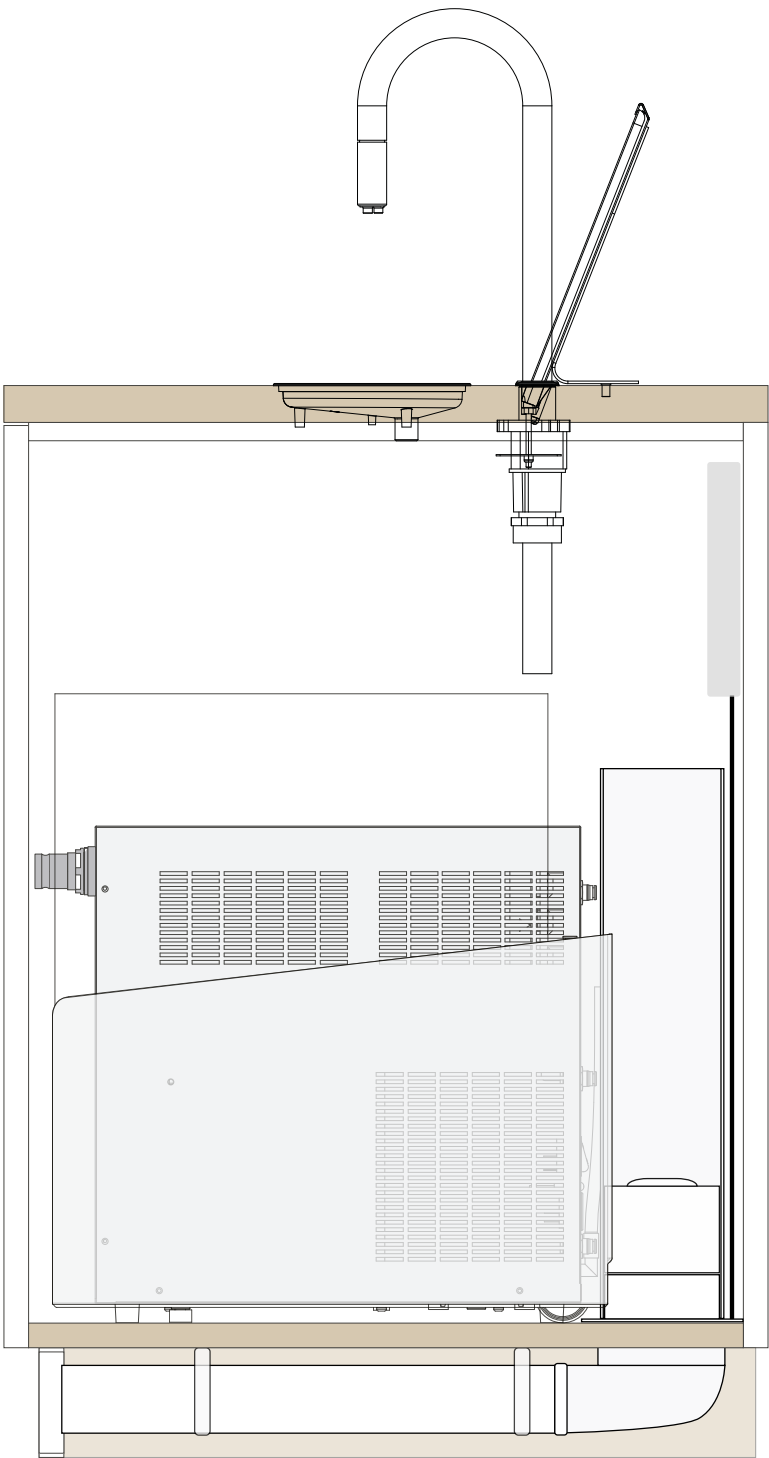


PLUMBING

VVS

KLEMPNERARBEITEN

水暖



scanomat

coffee solutions for more than 50 years

For more information & questions to your installation,
contact us on the below channels

Tecnical / Architect Support

E-mail: support@scanomat.dk

Chat: www.scanomat.com

International: +454918180


Denmark: +4549181212

Sweden: +46 (0)774 41 0000

Norway: +47 22662210

UK: architect@scanomat.co.uk

Locate Dealer: scanomat.com/services/partners

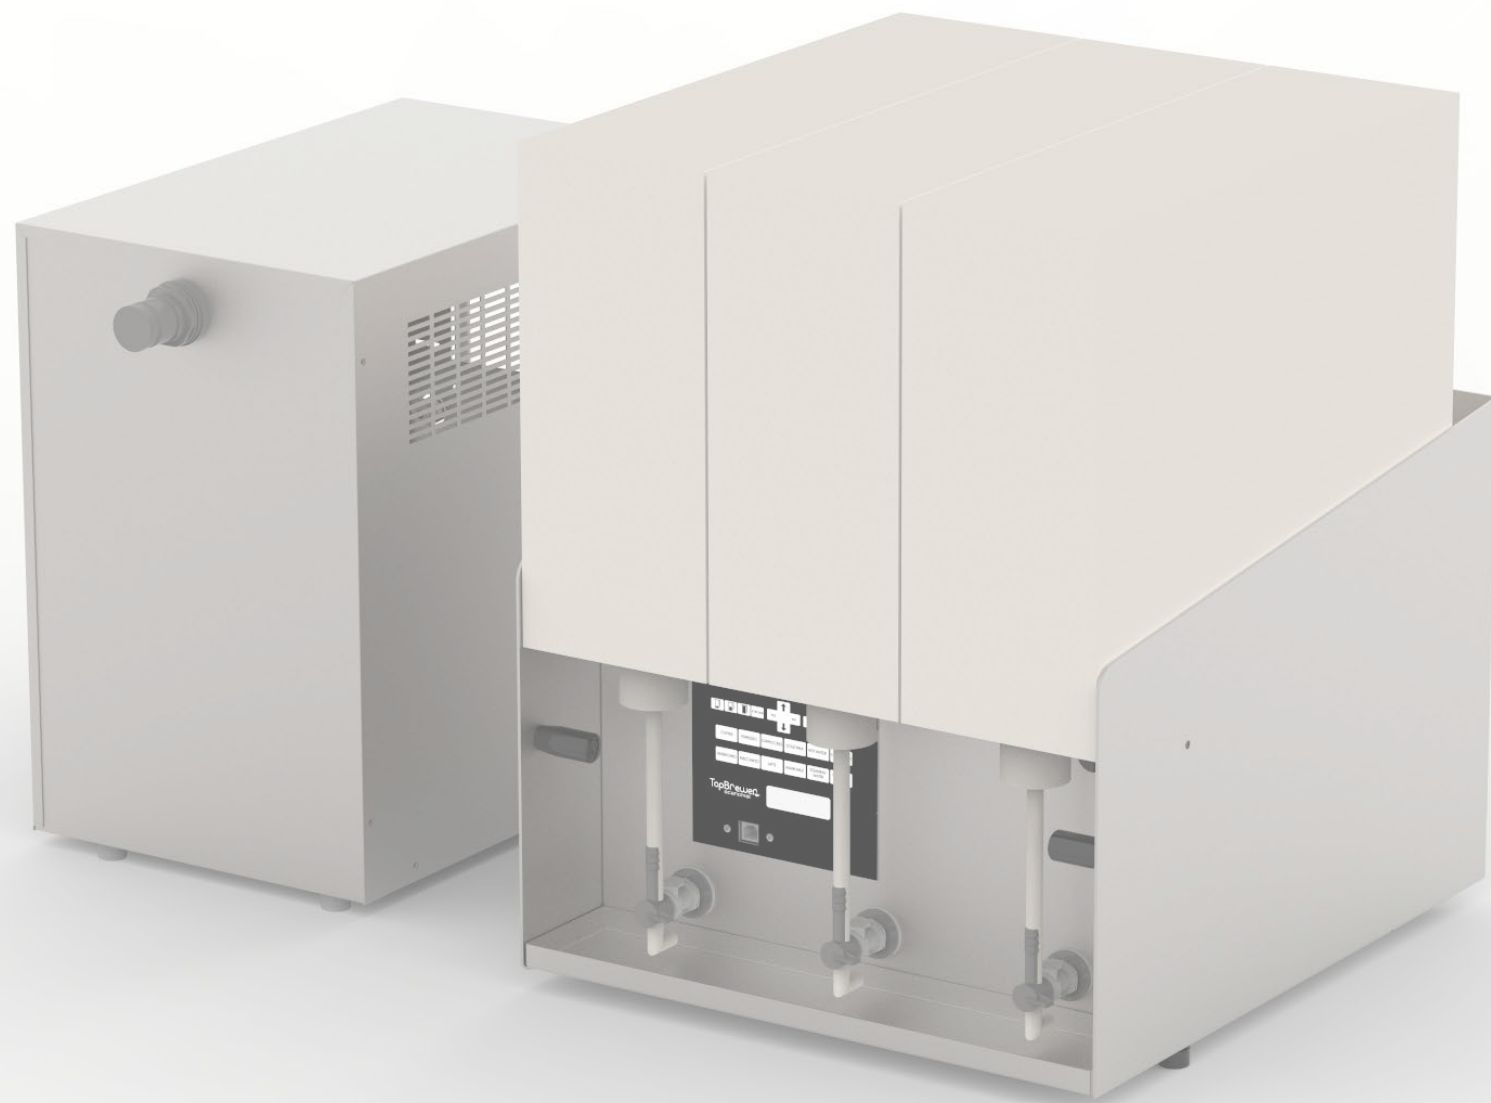

For TopJuicer
Version: 2.0
02-01-2020